

10/069366

JC10 Rec'd PCT/PTO 25 FEB 2002

TRANSMITTAL LETTER TO THE UNITED STATES

ATTORNEY'S DOCKET NUMBER 50606DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

INTERNATIONAL APPLICATION NO.
PCT/EP00/08349INTERNATIONAL FILING DATE
25 August 2000PRIORITY DATE CLAIMED
25 August 1999

TITLE OF INVENTION: APPARATUS FOR TRANSPORTING POLYMER DISPERSIONS

APPLICANT(S) FOR DO/EO/US Walter KASTENHUBER, Hubertus KROENER, Steffen FUNKHAUSER

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. /X/ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
 2. // This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
 3. /X/ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
 4. /x/ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
 5. /X/ A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. /X/ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. // has been transmitted by the International Bureau.
 - c. // is not required, as the application was filed in the United States Receiving Office (RO/USO).
 6. /X/ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
 7. /X / Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. /X / are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. // have been transmitted by the International Bureau.
 - c. // have not been made; however, the time limit for making such amendments has NOT expired.
 - d. // have not been made and will not be made.
 8. / X / A translation of the amendments to the claims under PCT Article 19(35 U.S.C. 371(c)(3)).
 9. / X / An oath or declaration of the inventor(s)(35 U.S.C. 171(c)(4)).
 10. // A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).
- Items 11. to 16. below concern other document(s) or information included:
11. / / An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
 - *12. / X / An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
 - 13. / / A FIRST preliminary amendment.
 - // A SECOND or SUBSEQUENT preliminary amendment.
 14. // A substitute specification.
 15. // A change of power of attorney and/or address letter.
 16. /x/ Other items or information.
International Search Report
International Preliminary Examination Report

2005220 9969366 023502

10/069366

U.S. Appl. No. (if known) INTERNATIONAL APPLN. NO.
PCT/EP00/09349ATTORNEY'S DOCKET NO.
50606

		CALCULATIONS	PTO USE ONLY
17. /X/ The following fees are submitted			
BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):			
Search Report has been prepared by the EPO or JPO.....	\$890.00	890.00	
International preliminary examination fee paid to USPTO (37 CFR 1.482).....	\$710.00		
No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....	\$740.00		
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO	\$ 1,040.00		
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied pro-visions of PCT Article 33(2)-(4).....	\$100.00		
ENTER APPROPRIATE BASIC FEE AMOUNT = \$		890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than // 20 // 30 months from the earliest claimed priority date (37 CFR 1.492(e)).			
<u>Claims</u>	<u>Number Filed</u>	<u>Number Extra</u>	<u>Rate</u>
Total Claims	13 -20		X\$18.
Indep. Claims	4 -3	1	X\$84.
Multiple dependent claim(s) (if applicable)			+280.
TOTAL OF ABOVE CALCULATION		=	974.
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).			
SUBTOTAL		=	974.
Processing fee of \$130. for furnishing the English translation later than // 20 // 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			
TOTAL NATIONAL FEE		=	974.
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) \$40.00 per property			
TOTAL FEES ENCLOSED		= \$	1,014.
		Amount to be refunded: \$	
		Charged \$	

- a./X/ A check in the amount of \$ 1,014. to cover the above fees is enclosed.
- b./ / Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c./X/ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 11-0345. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

KEIL & WEINKAUF
1101 Connecticut Ave., N.W.
Washington, D. C. 20036

SIGNATURE

Herbert B. Keil

NAME

Registration No. 18,967

AS ORIGINALLY FILED

Apparatus for transporting polymer dispersions

5 The invention relates to an apparatus for transporting polymer dispersions, such as
for example shear-sensitive polymer dispersions, to be prepared in a stirred-tank
reactor.

10 To avoid the heating up of reactors, such as for example stirred-tank reactors, in
which polymer dispersions are prepared, they are assigned external heat
exchangers. The polymer dispersion is fed to these in order to dissipate the heat of
reaction occurring. For this purpose, the reaction mixture - the polymer dispersion
being created - is pumped out of the reactor with a constant mass flow by the heat
exchanger. After extracting the heat of reaction, the reaction mixture is returned to
the stirred-tank reactor.

15 The polymer dispersions to be prepared may be very shear-sensitive and may
change their viscosity within wide ranges during the preparation process. The
polymer dispersions may tend to coagulate and assume a foam-like product
consistency, as a result of which the pump circulating the reaction mixture has to
20 meet special requirements. The pump should transport with as little shearing as
possible, so that coagulation is prevented, and the pump should be insensitive to
gas components in the product to be transported. Furthermore, the pump should be
insensitive to a certain amount of deposit formation.

25 In the transporting of polymer dispersions, as are known under the names Acronal
2010 B, 311 S and Diofan 290 D, so far pumps in which the impellers tend to
block after the beginning of polymerization have been used. This was caused by
the formation of polymerisate in regions of the impeller where there is a poor
through-flow and where deposits have formed, for example on stiffening and
reinforcing ribs, then leading to failure of the pumps within a very short time. In
30 the case of previously used configurations, it was unimportant whether the
impellers were enclosed by a spiral housing or protruded freely from the pumping
space.

On the basis of the prior art outlined, it is an object of the present invention to avoid to the greatest extent the adhering of polymer dispersions to these transporting apparatuses.

- 5 This object is achieved according to the invention in the case of an apparatus for transporting polymer dispersions, where it is possible for the apparatus to be driven by a drive and for the impellers of the apparatus to be surrounded by a housing, by a number of vanes being freely mounted in the region of the hub of the impellers in such a way that the pumping spaces on the front side and rear side of the impeller
10 are flowed through uniformly.

- The advantage of this solution is that, for low-viscosity, high-viscosity and semi-liquid polymer dispersions, there are no longer any dead spaces at the impellers where the constituents of the dispersions can be deposited in the form of layers one
15 on top of the other. With the solution according to the invention, a relative velocity between the medium and the vane can be retained in the pumping spaces on both sides of the curved vane, so that a relative movement between the medium and the adjacent vanes and the impeller hub is ensured at all times while the medium is in the pumping space.

- 20 In a further refinement of the idea underlying the invention, the angle of entry for the medium into the pumping spaces or the impeller pockets of the impeller is between 30° and 120° , preferably 90° at the entry hub. This ensures a uniform inflow of the medium, such as for example a shear-sensitive polymer dispersion.
25 Between six and twelve individual vanes may be mounted on the hub of the impeller, the number of vanes being dependent on the overall diameter of the impeller, the viscosity of the shear-sensitive products to be transported and the rotational speed of the drive. For reasons of optimum efficiency of the impeller according to the invention, eight vanes are mounted on the circumference of the
30 hub.

- To reduce the shear occurring, and to avoid the formation of deposits and permit improved cleaning of the impeller, the entire impeller may preferably be provided with a conductive PFA coating.

The vanes bounding the pumping spaces of the impeller have the same curvature on their front side, the delivery side, and on their rear side, the suction side. Thus, the front side and rear side may have the same radius of curvature, with the edges of all the vanes being of a well-rounded design in order not to hinder the flow movement of the shear-sensitive polymer dispersions around the individual vanes and in the region of the shaft hub.

In a design variant, the curvature of the center lines of the individual vanes between the center of the hub and the outer enveloping curve may describe a segment of a circle, which allows easier production of the vane geometry. The cross-sectional area of the individual vanes connected to the hub of the impeller is dimensioned in such a way that the areas bounding the pumping space on the delivery and suction sides of the vanes are wider than the material thickness of the vanes. For strength reasons, the material thickness must not be less than a certain value, it also being necessary for the design of the impeller with respect to mechanical strength to take into consideration the rotational speed and the media to be transported by the impeller according to the invention.

If an impeller according to the invention is arranged centrally in a spiral housing surrounding it, the desired transporting rates can advantageously be achieved already at relatively low drive speeds, the material stress occurring being relatively low in comparison with stresses occurring at higher speeds, which considerably increases the service life of the impeller.

The impeller according to the invention allows transporting from a stirred-tank reactor into a heat exchanger for extracting the exothermic heat of reaction that avoids the coagulation of shear-sensitive polymer dispersions and can be provided particularly advantageously in the associated circulating system. The impeller itself may both protrude freely into the pumping space and be enclosed by a housing, depending on the intended application.

The invention is explained in more detail below with reference to the drawing, in which:

Figure 1 shows the plan view of an impeller of a relatively large diameter,

Figure 2 shows a section through the shaft hub of the impeller according to Figure 1,

Figure 3 shows the view of the drive side of an impeller with a relatively small diameter,

Figure 4 shows the section through the impeller according to Figure 3 and

Figure 5 shows the plan view of the impeller according to Figure 3.

In the representation according to Figure 1, the plan view of an impeller of a relatively large diameter is reproduced.

The impeller 28 is fastened at its shaft hub 1 onto a drive shaft of a drive and has a number of vanes 2, which are all fastened to the hub 1. The individual vanes 2 are of a relatively large vane width 4 in comparison with their material thickness 3 and have a substantially rectangular cross-sectional profile. Formed between the individual vanes 2 are pumping spaces 5, which are bounded by a respective vane front side 7 and a vane rear side 8. The vane front side 7 represents the delivery side, while the vane rear side 8 represents the suction side of the runner at the impeller 28. The individual vanes 2 are formed in a vane curvature 9, which extends from the respective vane root 10 along the center line 11 of the vanes 2 to the enveloping curve 6, which encloses the ends of all the vanes 2 of the impeller 28.

With respect to the tangents to the center lines 11 in the region of the vane roots 10 of the vanes 2, the individual vanes 2 are arranged in relation to one another by the pitch angle 12. The free spaces 14 formed between two vane roots 10 are arranged offset in relation to one another by the pitch angle 13, with the pitch angle 12 for the vanes 2 and the pitch angle 13 for the free spaces 14 both being 45° when there are eight vanes 2 on the impeller 28. The vanes 2 may, for example, describe with their center line 11 a segment of a circle between the enveloping curve 6 and the center of the hub 1, as indicated in Figure 1. This vane geometry can be produced favorably in terms of production engineering.

The vanes 2 each have a front side 7 and a rear side 8, the front side 7 and the rear side 8 having identical paths of curvature. The free arrangement of the vanes 2 around the hub 1 has the effect that no dead spaces occur in the pumping spaces, so that a relative movement between the polymer dispersion and the impeller 28 is ensured at all times. Since relative movements occur between the medium and the contact areas on the impeller 28 at all times and at every location during the flowing through of the pumping spaces 5, only minimal deposits of polymerized-through material are able to form on the impeller 28 and on the housing surrounding it.

As a result of the direction of rotation 20 of the impeller 28, the respective delivery side of the runner is formed on the front side 7 of the vanes 2, while the suction side, replenished by new medium to be transported, is formed on the rear side 8 of the vanes 2. The vanes 2 are in each case of a well-rounded form in the region of their edges, so that a flow with as little shearing as possible is established around the individual vanes 2 on the impeller 28. The length and path of curvature of the individual vanes 2 determine the diameter 29 of the impeller 28, the length of the vanes 2 being dimensioned such that they have adequate strength properties even in their end regions near the enveloping curve 6.

Figure 2 shows the section through an impeller 28, the section being taken through the shaft hub 1. A thread 16 is provided there at a blind hole 15. The thread 16 is of such a nature that the sense of rotation of the thread 16 is directed counter to the direction of rotation of the impeller 28; the impeller 28 is unable to come loose during its rotation in the direction of rotation 20 during operation, but instead is constantly tightened. From the view according to Figure 2 there can also be seen the vane roots 10, at which the vanes 2 are connected to the hub 1, on which the hub continuation 17 extends on the drive side of the hub 1. Provided in the region of the vane roots 10 are bevels of approximately 45°, in order to avoid deposits occurring there on the vane roots 10 of the impeller 28 in the case of shear-sensitive materials.

Figure 3 shows an impeller 28, which is formed with a relatively small diameter 29, but even so receives eight vanes 2 on the hub 1, which however are curved to a greater extent in comparison with the configuration according to Figure 1.

The ends of the vanes 2 lie within the enveloping curve 6; their respective center line 11 is formed with a radius of curvature 21 which is less than the radius of curvature 9 represented in Figure 1. The front side 7, the delivery side, and the rear side 8, the suction side, are formed with an identical path of curvature and between them form the respective pumping spaces 5. At the ends of the vanes 2 there lies between the tangent 22 to the enveloping curve 6 and the tangent 24 to the center line 11 of the vane 2 the exit angle 23, at which the shear-sensitive polymer dispersion leaves the respective pumping space 5. The pitch angle 12 at which the vanes 2 are arranged on the circumference of the hub 1 is also 45° in the exemplary embodiment represented in Figure 3. The angular offset 18 marks the distance between the perpendicular intersecting the enveloping curve 6 from the end of the vane 2 through the center of the hub 1 and the rear side 8 of the vane 2. It is also the case in the configuration shown in Figure 3 that the material thickness 3 of the vanes 2 is less than the vane width 4 of the vanes, which increases the pump efficiency.

Figure 4 shows a section through the shaft hub 1 of the impeller 28 according to Figure 3. The edges of the vanes 2, of a well-rounded form in analogy with Figure 1, make it possible for the medium to be transported to flow around the vanes 2 without deposits and the formation of layers of polymerized-through material occurring in the contact region due to the formation of dead spaces. Here, too, in the hub continuation 17 there is formed a blind hole 15, in which a thread 16 is provided. In analogy with the configuration already described above, the connection between the drive shaft of the drive motor or gear mechanism and the impeller 28 takes place here.

Figure 5 shows the plan view of the impeller 28 according to Figure 3, which rotates in direction of rotation 20.

The pumping spaces 5 or impeller pockets 25 are bounded by the curved front sides 7, the delivery sides, and the curved rear sides 8, the suction sides, of the vanes 2. In the region of the vane root 10 (cf. Figures 2, 4), the vanes 2 are provided with bevels, which run at an angle of approximately 45°, in order to achieve as uniform a flow as possible around the hub region of the impeller 28. Formed above the free spaces 14, which are provided between the vane roots 10 of the individual vanes 2, are radii of curvature 27, which lie centrally in relation to

the width 26 of the free space 14. The mutually adjacent free spaces 14 create in the region of the hub a star-shaped flow region, which makes it possible for the shear-sensitive polymer dispersion to flow through without the build-up of coagulated polymer material occurring.

5

The impeller 28 may be produced from metal, particular attention having to be paid to deburring of the contact regions of the individual vanes 2. In addition to production from one piece, the individual vanes 2 may also be fastened in the region of the hub 2 on the outer circumference of the latter, for instance by means of a thermal joining process, before a coating of the outer surfaces takes place with a conductive material, such as PFA for example.

10

20090320 09:56:50

List of reference numerals

- | | |
|----|-----------------------------------|
| 1 | shaft hub |
| 2 | vane |
| 3 | vane thickness |
| 4 | vane width |
| 5 | pumping space |
| 6 | enveloping curve |
| 7 | vane front side |
| 8 | vane rear side |
| 9 | vane curvature |
| 10 | vane root |
| 11 | vane center line |
| 12 | pitch angle of vanes |
| 13 | pitch angle of free spaces |
| 14 | free space |
| 15 | blind hole |
| 16 | thread |
| 17 | hub continuation |
| 18 | angular offset of vane |
| 19 | angular offset of free space |
| 20 | direction of rotation |
| 21 | radius of curvature |
| 22 | tangent to enveloping curve |
| 23 | exit angle |
| 24 | tangent |
| 25 | impeller pocket |
| 26 | width of free space |
| 27 | radius of curvature of free space |
| 28 | impeller |
| 29 | diameter of impeller |

Patent claims

1. An apparatus for transporting polymer dispersions, said apparatus being capable of being driven by a drive and particularly comprising impellers (28), it being possible for said impellers both to be surrounded by a housing and to protrude freely into a medium, and a number of vanes (2) being mounted in the region of the hub (1), wherein a number of individual vanes (2) are freely mounted on the shaft hub (1) of an impeller (28), so that pumping spaces (5, 25) on the front side (7) and rear side (8) of the vanes (2) of the impeller (28) are flowed through uniformly.
2. The apparatus for transporting as claimed in claim 1, wherein the exit angle (23) from the impeller (28) lies between 30° and 120°.
3. The apparatus for transporting as claimed in claim 2, wherein the exit angle (23) is preferably 90°.
4. The apparatus for transporting as claimed in claim 1, wherein the entire impeller (28) is provided with a conductive PFA coating.
5. The apparatus for transporting as claimed in claim 1, wherein the vanes (2) bounding the pumping spaces (5, 25) have the same path of curvature on the front side (7) and rear side (8).
6. The apparatus for transporting as claimed in claim 5, wherein the vanes (2) have the same radius of curvature (9, 21) on the front side (7) and rear side (8).
7. The apparatus for transporting as claimed in claim 1, wherein the center line (11) of the vanes (2) on the impeller (28) describe a segment of a circle between the enveloping curve (6) and the center of the hub (1).

8. The apparatus for transporting as claimed in claim 1, wherein the edges of the vanes (2) of the impeller (28) are of a rounded form.
9. The apparatus for transporting as claimed in claim 1, wherein the ratio of the vane width (4) to the vane thickness (3) is > 1 .
10. The apparatus for transporting as claimed in claim 1, wherein the enveloping curve (6) of the impeller (28) is surrounded by a spiral housing.
11. An impeller for transporting polymer dispersions, said impeller being driven by a drive and a number of vanes (2) being mounted in the region of the hub (1), wherein a number of individual vanes (2) are freely mounted on the hub (1) of the impeller (28), so that pumping spaces (5, 25) on the front side (7) and rear side (8) of the vanes (2) of the impeller (28) are flowed through uniformly.
12. An impeller for transporting media, said impeller being capable of being driven by a drive and a number of vanes (2), in particular impellers (28), being mounted in the region of the hub (1), it being possible for said impellers both to be surrounded by a housing and to protrude freely into the medium, wherein a number of individual vanes (2) are freely mounted on the hub (1) of an impeller (28), so that pumping spaces (5, 25) on the front side (7) and rear side (8) of the vanes (2) of the impeller (28) are flowed through uniformly.
13. A method of preparing polymer dispersions, in particular shear-sensitive polymer dispersions, in a reactor with an external heat exchanger, with a transporting device which receives a transporting means (28), wherein the polymer dispersion flows through pumping spaces (5, 25) of an impeller (28) of which delivery and suction sides (7,8) are of the same geometry.

Abstract

The invention relates to an apparatus for transporting polymer dispersions, said apparatus being capable of being driven by a drive and being designed as an impeller (28). It is possible for said impeller both to be surrounded by a housing and to protrude freely into the polymer dispersion contained in the reactor tank. A number of vanes (2) are mounted in the region of the hub (1) of the impeller (28) in such a way that pumping spaces (5, 25) on the front side (7) and rear side (8) of the impeller (28) are flowed through uniformly.

(Figure 1)

20050606 0050/50606

FIG.1

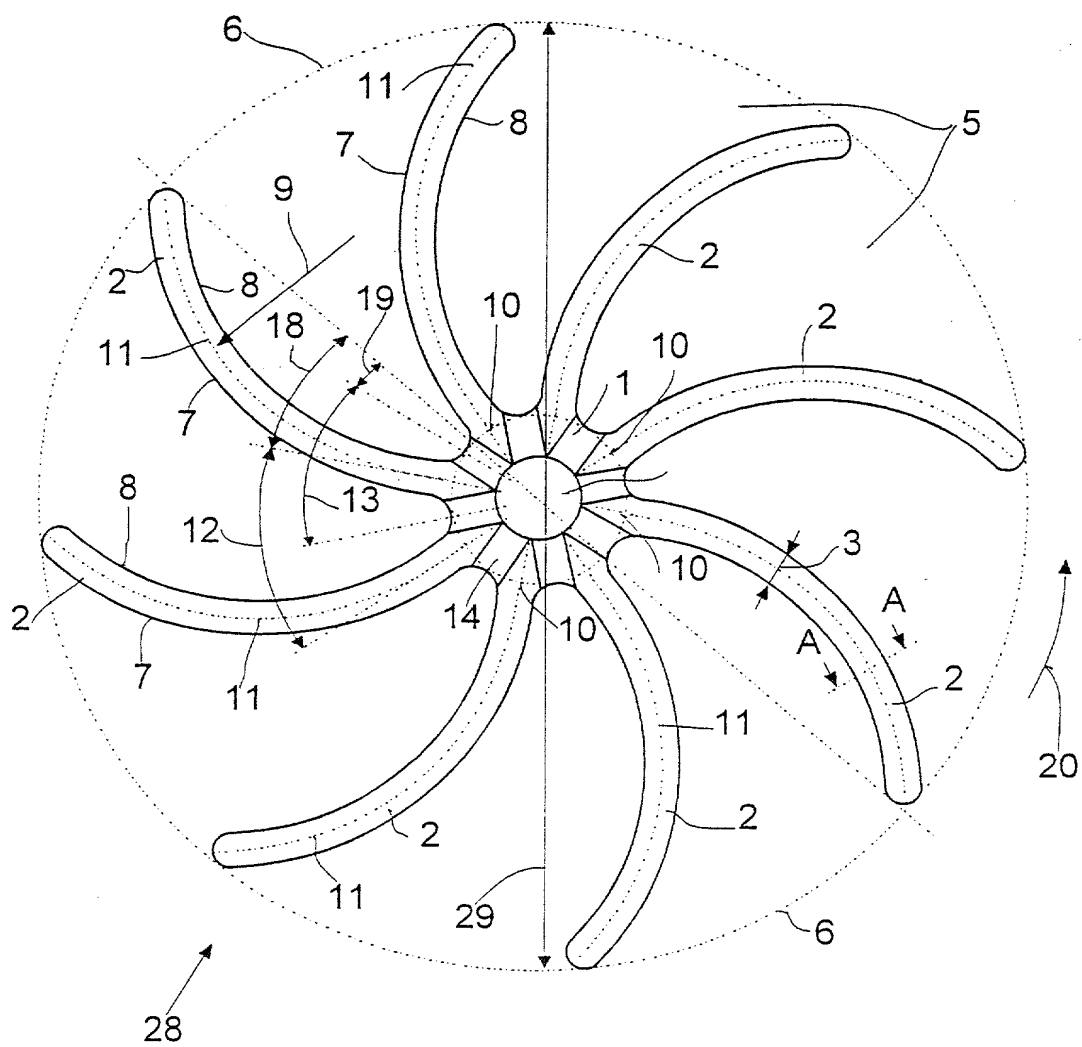


FIG.1

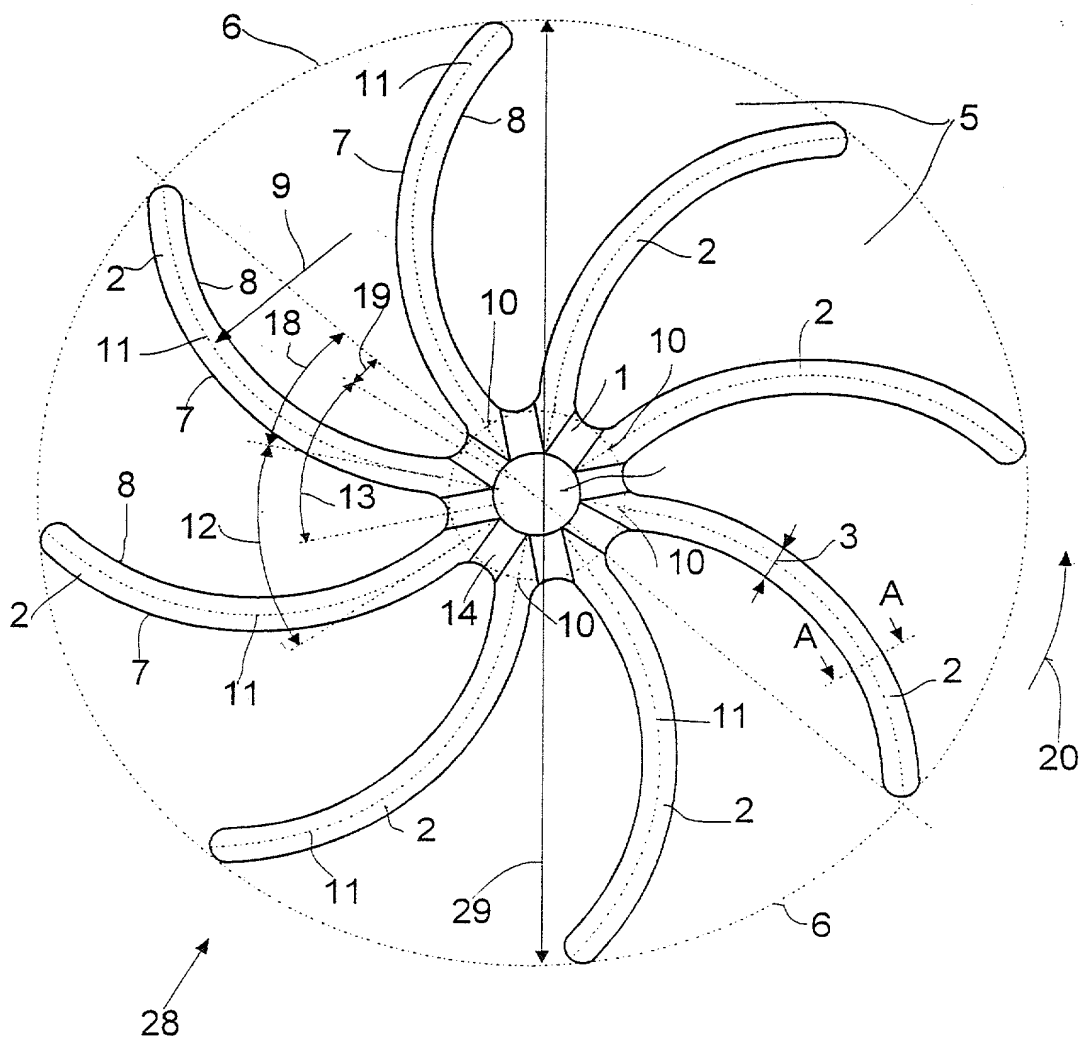


FIG.2


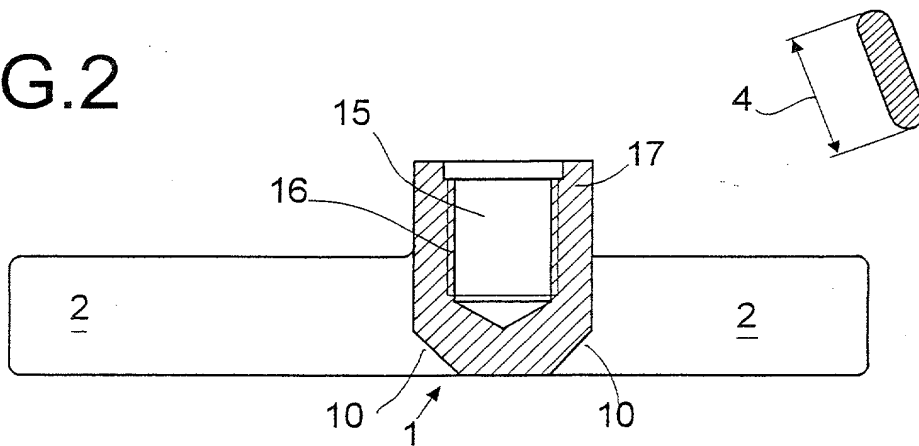


Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 1.5
Gender (male/female)	100/100
Education (years)	12.0 ± 1.0
Marital status (married/divorced/widowed)	100/0/0
Occupation (retired/working)	100/0
Income (USD/month)	1000.0 ± 200.0
Health insurance (yes/no)	100/0
Comorbidities (hypertension/diabetes/cholesterol)	50/30/20
Medication (yes/no)	100/0
Smoking status (smoker/non-smoker)	10/90
Alcohol consumption (yes/no)	10/90
Family history (yes/no)	20/80
Previous falls (yes/no)	10/90
Balance assessment (yes/no)	100/0
Walking speed (m/s)	1.0 ± 0.2
Stair use (yes/no)	100/0
Driving (yes/no)	100/0
Living alone (yes/no)	10/90
Number of children (0-4)	1.0 ± 1.0
Number of grandchildren (0-4)	1.0 ± 1.0
Number of pets (0-4)	1.0 ± 1.0
Number of visits to the doctor (0-4)	1.0 ± 1.0
Number of hospitalizations (0-4)	1.0 ± 1.0
Number of falls (0-4)	1.0 ± 1.0
Number of injuries (0-4)	1.0 ± 1.0
Number of fractures (0-4)	1.0 ± 1.0
Number of deaths (0-4)	1.0 ± 1.0
Number of suicides (0-4)	1.0 ± 1.0
Number of accidents (0-4)	1.0 ± 1.0
Number of crimes (0-4)	1.0 ± 1.0
Number of lawsuits (0-4)	1.0 ± 1.0
Number of lawsuits won (0-4)	1.0 ± 1.0
Number of lawsuits lost (0-4)	1.0 ± 1.0
Number of lawsuits settled (0-4)	1.0 ± 1.0
Number of lawsuits pending (0-4)	1.0 ± 1.0
Number of lawsuits on appeal (0-4)	1.0 ± 1.0
Number of lawsuits dismissed (0-4)	1.0 ± 1.0
Number of lawsuits withdrawn (0-4)	1.0 ± 1.0
Number of lawsuits abandoned (0-4)	1.0 ± 1.0
Number of lawsuits expired (0-4)	1.0 ± 1.0
Number of lawsuits barred (0-4)	1.0 ± 1.0
Number of lawsuits voided (0-4)	1.0 ± 1.0
Number of lawsuits annulled (0-4)	1.0 ± 1.0
Number of lawsuits rescinded (0-4)	1.0 ± 1.0
Number of lawsuits reversed (0-4)	1.0 ± 1.0
Number of lawsuits overturned (0-4)	1.0 ± 1.0
Number of lawsuits quashed (0-4)	1.0 ± 1.0
Number of lawsuits vacated (0-4)	1.0 ± 1.0
Number of lawsuits set aside (0-4)	1.0 ± 1.0
Number of lawsuits dismissed with prejudice (0-4)	1.0 ± 1.0
Number of lawsuits dismissed without prejudice (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on substantive grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on technical grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on legal grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on factual grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on evidentiary grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on substantive grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on technical grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on legal grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on factual grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on evidentiary grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on substantive grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on technical grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on legal grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on factual grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on evidentiary grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on substantive grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on technical grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on legal grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on factual grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on evidentiary grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on substantive grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on technical grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on legal grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on factual grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on evidentiary grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on substantive grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on technical grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on legal grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on factual grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on evidentiary grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on substantive grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on technical grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on legal grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on factual grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on evidentiary grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on substantive grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on technical grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on legal grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on factual grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on evidentiary grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on substantive grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on technical grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on legal grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on factual grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on evidentiary grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on substantive grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on technical grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on legal grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on factual grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on evidentiary grounds (0-4)	1.0 ± 1.0
Number of lawsuits dismissed on procedural grounds (0-4)	1.0 ± 1.0

[illegible]

FIG.5

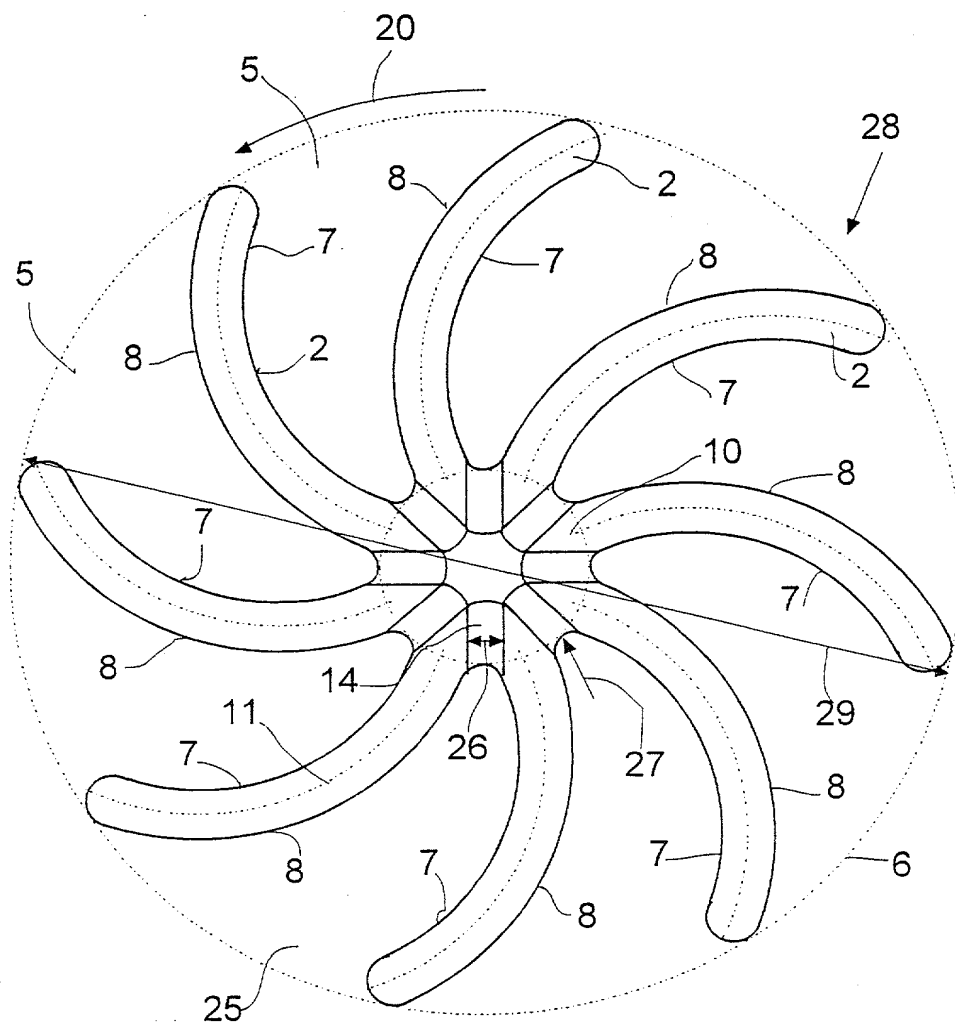

Declaration, Power of Attorney



26474

PATENT TRADEMARK OFFICE

Page 1 of 3

0050/050606

We (I), the undersigned inventor(s), hereby declare(s) that:

My residence, post office address and citizenship are as stated below next to my name,

We (I) believe that we are (I am) the original, first, and joint (sole) inventor(s) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Apparatus for transporting polymer dispersions

the specification of which

☒ is attached hereto.

☐ was filed on _____ as

Application Serial No. _____

and amended on _____.

☒ was filed as PCT international application

Number PCT/EP00/08349

on 25/08/2000

and was amended under PCT Article 19

on _____ (if applicable).

We (I) hereby state that we (I) have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We (I) acknowledge the duty to disclose information known to be material to the patentability of this application as defined in Section 1.56 of Title 37 Code of Federal Regulations.

We (I) hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed. Prior Foreign Application(s)

Application No.	Country	Day/Month/Year	Priority Claimed
19940399.6	Germany	25 August 1999	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

We (I) hereby claim the benefit under Title 35, United States Codes, § 119(e) of any United States provisional application(s) listed below.

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

We (I) hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

Application Serial No.

Filing Date

Status (pending, patented,
abandoned)

_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

② And we (I) hereby appoint **Messrs. HERBERT B. KEIL**, Registration Number 18,967; and **RUSSEL E. WEINKAUF**, Registration Number 18,495; the address of both being Messrs. Keil & Weinkauf, 1101 Connecticut Ave., N.W., Washington, D.C. 20036 (telephone 202-659-0100), our attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to sign the drawings, to receive the patent, and to transact all business in the Patent Office connected therewith.

We (I) declare that all statements made herein of our (my) own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Declaration

Page 3 of 3


0050/050606

1-00

Walter Kastenhuber
NAME OF INVENTOR

Pulversheimer Str.56
68229 Mannheim
Germany

DEX


Signature of Inventor

Citizen of: Germany
Post Office Address: same as residence


Date 22/11/2001

2-00

Hubertus Kröner
NAME OF INVENTOR

In der Achen 36
67435 Neustadt
Germany

DEX


Signature of Inventor

Citizen of: Germany
Post Office Address: same as residence


Date 22/11/2001

2-00

Steffen Funkhauser
NAME OF INVENTOR

Konrad-Adenauer-Allee 56
68519 Viernheim
Germany

DEX


Signature of Inventor

Citizen of: Germany
Post Office Address: same as residence

Date 22/11/2001